


Double-Coated Reinforced Butyl Tape

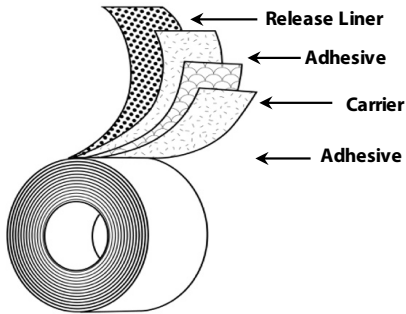

Adhesive: Butyl Rubber
Carrier: Cloth
Liner: 2 mil Release Coated PET Film
Specifications: N/A

Standard Sizes: 1.5 in x 36 yd

Applications

- Crawl space vapor barrier installation
- Laminate and bond various substrates
- Eliminating air penetration
- Noise and vibration damping
- Waterproofing and weatherproofing

Features

- Aggressive butyl mastic adhesive
- Cloth Reinforcement
- PET Film Liner

Benefits

- Bonds to smooth or textured surfaces
- Permanent air and water-tight bond
- Compatible with most sealants
- Maintains flexibility even in cold temperatures
- Retains structural integrity even at high temperatures
- Provides strength and dimensional stability
- Hand tearable
- Easy to peel, easy to use

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness (w/liner)	42.0 mils	1.067 mm	ASTM D-1000
Thickness (w/o liner)	40.0 mils	1.016 mm	ASTM D-1000
Adhesion to Steel (Air Side)	240 oz/in	26.26 N/cm	ASTM D903
Adhesion to Steel (Liner Side)	241 oz/in	26.37 N/cm	ASTM D903
Adhesion to PE (Air Side)	256 oz/in	28.01 N/cm	ASTM D903
Adhesion to PE (Liner Side)	166 oz/in	18.16 N/cm	ASTM D903
Tensile Strength	35 lb/in	61.29 N/cm	ASTM D-1000
Application Temperature	30 to 180 °F	-1 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.