




### PRODUCT INFORMATION

DuPont™ Tyvek® 400 Coverall. Comfort Fit Design. Stormflap. Respirator Fit Hood. Elastic Wrists and Ankles. Elastic Waist. Serged Seams. Pin Lock Slider Zipper Pull. White.

### ATTRIBUTES

|                         |   |
|-------------------------|---|
| <b>Full Part Number</b> | TY127SWHxx0025yy (xx=size;yy=option code) <a href="#">?</a> |
| <b>Fabric/Materials</b> | TYVEK® 400  |
| <b>Design</b>           | Coverall w/ Resp. Fit Hood, Elastic Wrists and Ankles       |
| <b>Seam</b>             | Serged  |
| <b>Color</b>            | White   |
| <b>Quantity/Box</b>     | 25 per case   |
| <b>Sizes</b>            | MD, LG, XL, 2X, 3X, 4X, 5X, 6X, 7X                          |
| <b>Option Codes</b>     | VP,00,NF  |

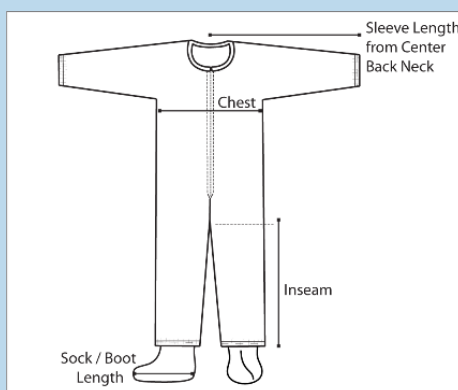

### SIZE TABLE

| SIZE | SLEEVE LENGTH | CHEST WIDTH | INSEAM | FITS CHEST      | FITS HEIGHT  |
|------|---------------|-------------|--------|-----------------|--------------|
| MD   | 33 1/2        | 25          | 28     | 36 3/4 - 40 1/4 | 5'0" - 5'7"  |
| LG   | 35            | 26 1/2      | 29     | 39 3/4 - 43 1/4 | 5'5" - 5'9"  |
| XL   | 36 1/2        | 28          | 29 1/2 | 42 3/4 - 46 1/4 | 5'8" - 6'2"  |
| 2X   | 38            | 29 1/4      | 30 1/2 | 45 1/4 - 48 3/4 | 6'0" - 6'4"  |
| 3X   | 38            | 31 1/4      | 31 1/2 | 49 1/4 - 52 3/4 | 6'2" - 6'4"  |
| 4X   | 38 1/2        | 33          | 32 1/2 | 52 3/4 - 56 1/4 | 6'4" - 6'7"  |
| 5X   | 39 1/2        | 34 1/2      | 33 1/2 | 55 3/4 - 59 1/4 | 6'7" - 6'10" |
| 6X   | 41            | 36 1/4      | 34 1/2 | 59 1/4 - 62 3/4 | 6'9" - 7'1"  |
| 7X   | 42            | 37 1/2      | 35 1/2 | 61 3/4 - 65 1/4 | 7'0" - 7'4"  |

### PHYSICAL PROPERTIES

| PROPERTY                            | TEST METHOD | TYPICAL RESULT              |
|-------------------------------------|-------------|-----------------------------|
| Thickness (PPSH-249)                | ASTM D1777  | 5.9 mils                    |
| Basis Weight                        | ASTM D3776  | 1.2 oz/yd <sub>2</sub>      |
| Burst Strength - Mullen.            | ASTM D774   | 50 psi                      |
| Seam Strength                       | ASTM D1683  | > 19 lb <sub>f</sub>        |
| Breaking Strength - Grab (MD).      | ASTM D5034  | 18 lb <sub>f</sub> /in      |
| Breaking Strength - Grab (CD)       | ASTM D5034  | 22 lb <sub>f</sub> /in      |
| Hydrostatic Head                    | AATCC 127   | 45 inches H <sub>2</sub> O  |
| Surface Resistivity (23°C / 25% RH) | EN 1149-1   | <2.5 x 10 <sup>9</sup> ohms |
| Wearing Apparel Flammability        | 16 CFR 1610 | Class 1                     |

### WARNING

- \*Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.
- \*Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®400, Tyvek® 400 D, ProShield®, ProShield® 10, ProShield® 60, Tyvek® 400 FC, and ProShield® 70 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. Tyvek® 500 and Tyvek® 600 offer improved liquid barrier, but may not be appropriate if spotting is observed on the skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® 2000 and Tychem® 4000 garments with taped seams.
- Tyvek® 600 and Tyvek® 500 fabric have different fabric physical properties and improved chemical resistance properties than standard Tyvek® 400 garments.
- \*\*Garments made using Tyvek® 400, Tyvek® 500, Tyvek® 600 and Tyvek® 800 fabrics will burn and possibly melt. None of these garments should be worn near heat, open flames, sparks or any other possible ignition source nor should they be worn in potentially explosive or flammable environments. If these garments do burn or melt while being worn, it may increase the severity of burn injuries even when worn over garments which are flame resistant, including, but not limited to, Nomex® IIIA or Nomex® Comfort garments.
- \*CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, we make no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.


Cellosolve® and Selexol™ are registered trademarks of Dow Chemicals Company. Skydrol® is a registered trademark of Solutia.


Tyvek® friction-coated shoe covers or Tyvek® garments with attached friction-coated skid-resistant shoe covers might contain silicone in the shoe-cover. This includes styles TY122, TY121, FC450 and FC454. End users who are consuming these styles and who have concerns about silicone contamination should conduct their own testing to ensure they are suitable for their application(s).

Tyvek® 500, Tyvek® 600, Tyvek® 800 products manufactured before January 2023 did contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.

**DuPont™ SafeSPEC™ - We're here to help**

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical and controlled environment hazards.





**DuPont Personal Protection SafeSPEC™**

[DuPont Personal Protection](#)

[DuPont Personal Protection](#)

[DuPont Personal Protection](#)

CREATED ON: OCTOBER 9, 2024