




# 5560

## Removable Polyethylene Film Tape

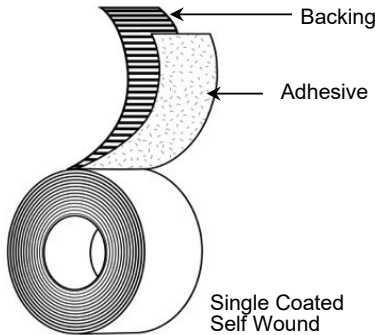

- Backing:** LDPE Film
- Adhesive:** Acrylic
- Liner:** Self Wound or with 66# Clay Coated Kraft
- Colors:** Clear, Transparent Orange, White
- Specifications:** N/A
- Size Options:** Incremental widths 1/4" - 54" x 108ft

### Applications

- Surface and label overlaminates
- Temporary surface protection
- Protective masking on plastics and metals during shipping and assembly - saves money by reducing damage to delicate surfaces!

### Features

- LDPE Film
- Acrylic Adhesive

### Benefits

- Thick and highly conformable
- Abrasion and moisture resistant
- Perforated spacing available
- Solvent resistant
- Excellent high and low temperature performance
- Removes cleanly - will not leave residue
- Easy to apply

### Typical Test Values

|                                | Standard UOM  |       | Metric UOM   |      | Test Method |
|--------------------------------|---------------|-------|--------------|------|-------------|
| <b>Total Thickness</b>         | 5.5           | mils  | 0.140        | mm   | PSTC-133    |
| <b>Substrate Thickness</b>     | 4.5           | mils  | 0.114        | mm   | PSTC-133    |
| <b>Adhesion to Steel</b>       | 12            | oz/in | 1.31         | N/cm | ASTM D-3330 |
| <b>Tensile Strength</b>        | 12            | lb/in | 21.02        | N/cm | ASTM D-3759 |
| <b>Elongation</b>              | 500%          |       |              |      |             |
| <b>Application Temperature</b> | 50 to 120 °F  |       | 10 to 49 °C  |      |             |
| <b>Operating Temperature</b>   | -40 to 190 °F |       | -40 to 88 °C |      |             |

Recommended Storage Conditions: 40-60% Humidity, 60 - 80 °F  
 Standard Shelf Life (at 25 °C): 12 months from shipment date

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY GLOBAL'S knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.

